

Imola x272-SGR-IKR

Datasheet



Imola x272-SGR-IKR

Smart Grid Router



2

The **Imola SMART GRID ROUTER** series meets the needs of communication, automation, control and protection of the Smart Grid architecture (for the production, transmission and distribution sector of water, gas, electricity and renewable energy).

The **IMOLA SGR** series router are suitable for industrial environments. They guarantee low absorption power and they are available both with AC or DC power supply.

FEATURES

Imola SGR models fits the evolution of the Imola router series, that are certified and used by the networks of the main telecommunication operators. All Imola routers include the following functionalities:

- **Routing**
- **Switching**
- **Multi fail-over**
- **QoS**
- **Security**
- **Zero Touch Provisioning**

KEY BENEFITS

- ⇒ Always-on connectivity and service continuity
- ⇒ Security
- ⇒ Easy installation and factory preconfiguration
- ⇒ SIMs are installed and tested in factory on each device
- ⇒ Remote management and provisioning
- ⇒ Scalability
- ⇒ Multiple backup

APPLICATIONS

Thanks to the possibility to connect via Fiber (active and GPON), ultrabroadband eVDSL and integrated LTE, the Imola SGR routers guarantee

"always on" connectivity:

- between primary and secondary substations
- towards telecontrol, monitoring and smart metering control centers in cloud

MODELS




IMOLA 0272-SGR-IKR




IMOLA 5272-SGR-IKR



INTERFACES

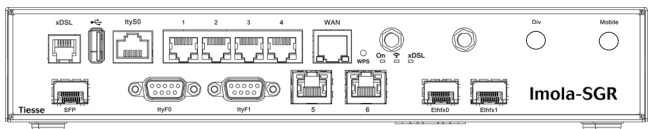

Imola 0272-SGR-IKR

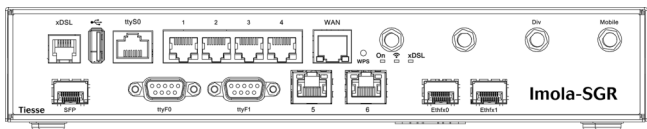

Imola 5272-SGR-IKR

	IMOLA x272-SGR -IKR	
	0272-SGR-IKR	5272-SGR-IKR
RS232 serial port	2	2
LAN ports - ETH 10/100/1000 Mb Switch	6	6
LAN FIBER port - SFP cage	2	2
WAN port - ETH 10/10/1000 Mb	1	1
WAN FIBER port - SFP cage	1	1
WLAN port - 802.11 b/g/n	1	1
eVDSL / VDSL2 /ADSL2+ port	1	1
4G	-	•
Console port	1	1

eVDSL

- Support of thenew generation networks (NGN), ensuring:
- Support for VDSL2 profiles: from 8 MHz to 35 MHz in accordance with ITU-T G993.2 Annex Q standard (35b profiles or Vplus) capable of aggregate rates up to 400Mbps
 - G.Vector standard-compliant (ITU-T G.993.5)
 - ITU-T G.998.4G.INP standard-compliant (impulse noise protection)
 - ADSL2 compatible (backward compatibility)

4G


- Radio interfaces
- LTE: downlink data rate of 150 Mbps and 50 Mbps uplink*
 - DC-HSPA+ (42 Mbps in DL) with fallback
 - Support of Multiple Input/Multiple Output (MIMO)
 - It is possible to activate and configure two APN simultaneously.
- Frequencies
- LTE 800 / 900 / 1800 / 2100 / 2600 Mhz
 - WCDMA 900 / 2100 Mhz
 - EDGE / GPRS / GSM 900 / 1800 / 1900

FIBER ACCESS

- Single and/or multiple fiber access for LAN and WAN via optic cables
- GPON connections are supported
- Different types of transceivers supported:
 - max data rate 1000 Mbps (SX,BX, LX, ZX)
 - supported connectors: LC simplex, LC duplex, RJ45

Zero Touch Provisioning

IMOLA routers are integrated in the TNA (Tiesse Network Architecture) suite, which is used for the remote and automated management via WEB of the configurations and firmware releases of the installed device park.



INTERFACES

HARDWARE INTERFACES			0272 -SGR-IKR	5272 -SGR-IKR
LAN	GE	10/100/1000 Mbps port, RJ45 connector	6	6
	Wi-Fi	802.11 b/g/n (2.4 GHz) 2x2	1	1
	Fibra	SFP Cage for LAN side Fiber connection (SFP module not included)	2	2
WAN	GE-WAN	Combo port GE 10/100/1000 Mbps RJ45 (label WAN) and WAN SFP (SFP0)	1	1
	SFP WAN	SFP Cage WAN for Fiber and GPON connections (SFP module not included)	1	1
	ADSL 2/2+ VDSL2 eVDSL2	Full rate ADSL2/2+ / VDSL2 RJ11 - RJ11 connector ADSL2/2+ <ul style="list-style-type: none"> Downstream data rate up to 24 Mbps - Upstream data rate up to 3.5 Mbp Conformity to the Standard: G.992.1 annex A,B,C&I, G.992.2-g.Lite, G.992.3 annex A, B, I, J, M, G.992.4-g.Lite.bis, G.992.5 annex A, B, C, I, J, M, ANSI T1.413 issue2, ETSI TS 388 ADSL-over-ISDN, ITU T-I361, ITU T-I.363.5, ITU T-I.432, ITU T-I610, ITU T-I731 VDSL2 <ul style="list-style-type: none"> Support of VDSL2 profiles: 8 MHz to 30 MHz ITU-T G993.2 Conformity G.Vector (ITU-T G.993.5) standard Conformity to ITU-T G.998.4 G.INP standard Compatible to ADSL2 (backward compatibility) eVDSL2 <ul style="list-style-type: none"> Support of 35MHz ITU-T G993.2 Annex Q (profili 35b o Vplus) profile, with aggregate rate up to 400 Mbps 	1	1
RADIO CELLULAR	GSM/GPRS EDGE	Frequency band: 900 / 1800 / 1900 MHz GPRS multislot 10, EDGE multislot 12	-	•
	UMTS / HSDPA / HSUPA /	<ul style="list-style-type: none"> Frequency band: 900/2100 Mhz HSDPA data rates up to category 20 HSUPA data rates up to category 6 	-	•
	DC-HSPA+	<ul style="list-style-type: none"> 42 Mbps in download 	-	•
	LTE	<ul style="list-style-type: none"> Frequency band: 800/900/1800/2100/2600 Mhz Data rates (category 4, MIMO)* Peak data rates 150 Mbps DL, 50 Mbps UL (actual throughput depends on network configuration, bandwidth assigned to the UE, the number of users and the RF signal conditions) WCDMA 900/2100 <p><i>* category 6 and 12 are available on request</i></p>	-	•
Only LTE models				
SERIAL	Console	RJ45 connector	1	1
	RS232	Full RS232 DCE port	2	2
USB		USB 3.0 port	1	1

SOFTWARE – Features

Imola SGR routers are supporting all the functionalities needed to use them in Smart Grid mission critical scenarios.

- Execution of event based command
- Dynamic Routing RIPv1, RIPv2, OSPF, BGP support of BFD and VRRP
- Conversion of IEC 61850-101 to 104 and IP Tunnelling IEC 61850-101 (on specific models)
- Precision Time Protocol IEEE 1588
- Traffic management L2 Generic Object Oriented Substation Event (GOOSE) and L2TPv3 (RFC 3931)
- Ring Protocol STP
- QoS Advanced Features, with the possibility to define an arbitrary number of priority classes

Trigger event

RIP - OSPF - BGP - BFD - VRRP

61850-101 vs 104

IEEE 1588

GOOSE-L2TPv3

Ring Protocol

Advanced QoS

SOFTWARE

NETWORKING

- TCP-UDP IPv4
- ARP ICMP
- IPv4 Path MTU Discovery
- IPv6 support: ICMPv6, IPv6 Path MTU Discovery, IPv6 Neighbor Discovery
- IPv6 Stateless Address Auto Configuration

LAYER 2
features

- LAN Bridging
- VLAN support on LAN interface 802.1q in Access mode, Trunk, native VLAN and Hybrid mode
- Layer 2 Protocol Tunneling (L2PT)
- 802.1Q-in-802.1Q

ROUTING &
MULTICAST

- Static, Policy routing, RIPv1, RIPv2; BGP-4, BGP-4+, OSPFv2
- Routing redistribution and tagging
- IGMP v1-v2-v3, IGMP snooping, IGMP proxying
- Multicast routing with PIMv2 sparse-mode and PIMv2 dense-mode, MSDP
- VRRP (Virtual Routing Redundancy Protocol) with IPv4-IPv6 authentication
- IEEE 802.1d (Spanning Tree Protocol)

QoS

- Traffic classification based on source IP, on a combination of source IP, destination IP, protocol (UDP, ICMP, TCP, etc) ports, application recognition, IP Precedence and DSCP
- DiffServ
- Remarking di IP Precedence, DSCP and CoS
- QoS on ATM class
- Shaping with guaranteed allocated bandwidth and redistribution of bandwidth excess
- Committed Access Rate e Multicast rate Limit
- Mechanisms of traffic prioritization, ability to define an arbitrary number of priority classes
- Link aggregation IEEE 802.3ad

SECURITY

- NAT/PAT
- ACLs, Stateful Firewall
- SSL Tunnelling
- L2TP
- GRE Tunnelling with keep alive and key sequence numbering (radio mobile network optimization)
- VPN with IPSEC/ESP or IPSEC/AH IKEv1/ IKEv2

SERVICES

- DHCP client, DHCP server with antispoofing functions, DHCP Layer Discovery Protocol IEEE 802.1ab, DHCP relay
- Intelligent DNS Proxy, local and remote
- Traceroute
- NTP Client and Server support
- Easy VPN
- DDns

MANAGEMENT
AND
CONFIGURATION

- SNMP v1, SNMPv2, SNMPv3
- Telnet server with multiple simultaneous sessions
- SSH server with multiple simultaneous sessions (SSHv2)
- Netflow
- IP SLA support for: One Way Delay, Round Trip Delay, Jitter, Packet Loss
- Fault management Syslog /Trap
- Radius Support, TACACS+
- Tracking for backup management, commands and scheduled events
- Software update via TFTP and FTP
- Configuration via command Line Interface (CLI), Text/Menu oriented and Telnet
- TNA (Tiesse Network Architecture) suite for auto-provisioning and remote automated management
- Management of an arbitrary number of configurations

HARDWARE FEATURES

POWER	AC/DC (internal Universal 100-240 VAC) Power Switch ON/OFF
CONSUMPTION	< = 12W (Full configuration)
ENVIRONMENT	Operating temperature: -25° C / +70° C (96 hours) -40° C / +70° C (4 hours) Storage temperature: -40° C / +70° C Max operating humidity: 93% (non condensing)

PROCESSOR	Dual CORE 1 GHz
MEMORY	DRAM 256 MB DDR3
FLASH MEMORY	256 MB

EXTERNAL FEATURES

Material	Metal - black
Antennas	Radio WLAN 2 x external removable antennas SMA male connector Radio cellular 4G 2 x 4G external removable antennas SMA male connector
Mounting	Horizontal plane Rack mouting available via optional kit

LED INDICATORS

Status LED	1 x power / operative status
Ethernet	2 x operative status - for each port
SFP	1 x operative status - for each port
xDSL	1 x connection status
Wi-Fi	1 x 2.4 GHz radio signal activity
Radio cellulare	1 x radio cellular connection status
	1 x radio cellular data exchange activity
	1 x operational SIM

4G ANTENNAS

- Support OF Multiple Input/Multiple Output (MIMO)
- 2 removable antennas, SMA male
- Outdoor high gain antenna available on request, both omnidirectional and directional


ADD-ONS



Accessories add-ons are optionally available, like SFP modules, omnidirectional or directional antennas (indoor and outdoor - only for cellular models) as well as rack mounting kits.

Please, refer to the specific documentation available on our website www.tiesse.com.

SIZE

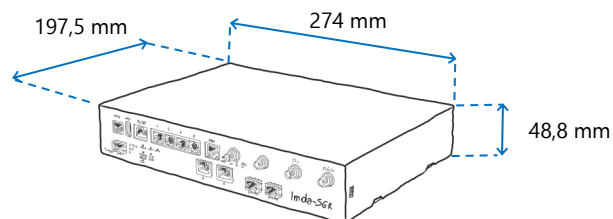

STANDARD WEIGHT

1900 gr ±10%

TECHNICAL SUPPORT

Tiesse provides the user with two sites that are constantly updated:

Support.tiesse.com: the site with technical documentation, assembly instructions, software updates, and how to request technical support.

Wiki.tiesse.com: the site with manuals, instructions for installation, case studies, scenarios, FAQs, etc.

Tiesse

innovation made in Italy®

Tiesse is a 100% Italian company which has more than 20 years of expertise in designing, developing, and manufacturing M2M/IoT and network devices. The products series **IMOLA**, **LIPARI** and **LEVANTO**, which are innovative, competitive and certified, are present in the largest distributed national networks (from gas stations to large retailers, insurance companies and banks) as well as in the largest networks of the main gaming operators and energy sector.

Web site: www.tiesse.com

Information: mail@tiesse.com | **Marketing & Sales:** marketing@tiesse.com

Ivrea – Headquarter - Sales offices, Manufacturing facility and R&D: Via Asti 4, 10015 Ivrea (TO) - Tel +39.0125230544 - Fax +39.0125631923

Rome – Sales offices and R&D: Viale L. Gauro 9/11, 00143 Roma EUR - Tel +39.0654832203 - Fax +39.0654834000

Turin - R&D: Via Livorno 60, 10144 Torino (TO) | **Avezzano** - R&D: Via C. Corradini 80, 67051 Avezzano (AQ)

