



Imola x272-SGR series

Imola 0272-SGR
Imola 0272-SGR-IK2W

Imola 5272-SGR
Imola 5272-SGR-IK2W



Serie Imola x272-SGR



4G ultra-broadband router with fiber and eVDSL connectivity

IMOLA X272-SGR SERIES

The **Imola SGR series** is an innovative line of routers with ultra broadband VDSL Enhanced and fibre connectivity, with 7 Ethernet ports, Wi-Fi connectivity and cellular radio in a single device.

The different models of the SGR series are distinguished by the presence or absence of 4G cellular radio connection, single b/g/n or dual b/g/n and ac Wi-Fi, resulting in four variants that meet the communication, automation, control and protection needs of Smart Grid architectures..

Thanks to the optional mounting kit, all products in the Imola SGR series become rack-mountable.

ALL-IN-ONE



FTTC, FTTH, FWA, 4G/5G in a single device for reliable, versatile and scalable connectivity. Our equipment is adaptable to any technology and includes the functionalities of:

- Routing & switching
- Security and VPN
- QoS

KEY FACTORS



Secure by design

Right from the design phase for robust and natively secure solutions.



Always-On

Stable connections anywhere, with multiple links, transparent backup, and quality of service for uninterrupted business.



Certified

Validated for inclusion in business offering profiles and use within the networks of major telecom operators.



Rugged and carrier grade

Designed to withstand and operate for long periods in industrial and disturbed environments. Carrier grade reliability.



Smart value

Maximizes business value with an excellent performance-to-price ratio.



Zero Touch Provisioning

Zero Touch Provisioning facilitates remote management and agile configuration of the installed base.



Eco-efficient

Minimal consumption, lower environmental impact and higher operating cost savings.



Future proof

Safeguarding the investment with future 5G and/or Fibre technologies.



100% factory-tested and factory pre-configurations

We test all our equipment, including SIM cards for models with a cellular radio connection. Factory pre-configurations on your specific customer case



IMOLA x872-IKF-IKW models

The Imola x272-SGR models are distinguished by the presence or absence of 4G cellular radio connection and the presence of single or dual Wi-Fi.



6 Gigabit Ethernet ports



1 eVDSL port



3 fiber ports



Wi-Fi b/g/n



Dual Wi-Fi b/g/n & ac



1 radio 4G cat. 4 port



2 SIM slot for backup link



Zero Touch Provisioning



Rack-mountable with optional kit



**IMOLA
0272-SGR**



**IMOLA
0272-SGR-IK2W**



**IMOLA
5272-SGR**



**IMOLA
5272-SGR-IK2W**



SUGGESTED SCENARIOS AND APPLICATIONS



ISP & Telco Ready
Designed to meet the requirements of service providers, telecom operators, carriers, and system integrators.



Smart grid & Smart cities
Designed for the power, renewables, gas and water sectors: it is perfect for automation, remote control and Smart Grid management applications.



Service continuity and Mission Critical applications
Business applications requiring always-on links and quality of service

BACKUP: high availability mission critical

Seamless backup

The user does not perceive service interruptions and the transition to backup.

Transitions from normal to backup mode and vice versa are performed considering the operational costs.

Multiple Backup

A pair of routers in VRRP performs physical backup of both the network and hardware.


Homogeneous Backup

A single router integrates all ports, wired and mobile.

Heterogeneous backup

An installed base can be upgraded by adding a mobile router and using the VRRP (Virtual Router Redundancy Protocol).

ZERO TOUCH PROVISIONING

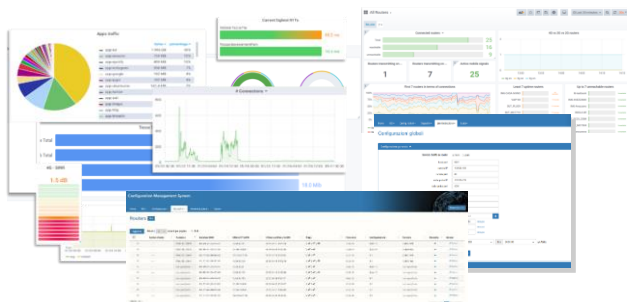

Tiesse's router are integrated in the **TNA (Tiesse Network Architecture)** suite.

TNA is the modular software suite that enables Zero Touch Provisioning network architecture, including monitoring, remote and automated web-based management of configurations and firmware releases of the installed fleet; it enables traffic engineering, network overlays, and many other functionalities.


A complete datasheet of the solution is available at www.tiesse.com.



HARDWARE INTERFACES


Port	N°	Type	Details
LAN	6	GE	10/100/1000 Mbps
	1	Wi-Fi (single)	- Only 0272-SGR and 5272-SGR - 802.11 b/g/n port (2.4 GHz) 2x2, up to 300 Mbps - 2 removable antennas, male SMA connector, back of product
	1	Wi-Fi (dual)	- Only IK2W models - 802.11 b/g/n port (2.4 GHz) 2x2, up to 300 Mbps - 802.11 ac (5 GHz), up to 1300 Mbps - 4 removable antennas, male SMA connector, 2 on the back of product and 2 on the front
	2	Fiber	SFP cage ports for fiber connections (SFP module not included)
WAN	1	GE	1 combo port GE 10/100/1000 Mbps RJ45 (WAN) and WAN SFP (SFP0)
	1	Fiber	- SFP port for WAN access with fiber optic cable (SFP0) - Supports GPON connections - Support for different models of SFP transceiver modules (not included) - Maximum data rate 1000 Mbps (SX, BX, LX, ZX) - Supported connectors: LC simplex, LC duplex
		xDSL	Full rate ADSL2/2+ / eVDSL, RJ11 connector
		ADSL2/2+	- Velocità di trasmissione dati in downstream fino a 24 Mbps e velocità di trasmissione dati in upstream fino a 3,5 Mbps - Conforme agli Standard G.992.1 annex A, B, C & I, G.992.2-g.Lite, G.992.3 annex A, B, I, J, M, G.992.4-g.Lite.bis, G.992.5 annex A, B, C, I, J, M, ANSI T1.413 issue2, ETSI TS 388 - ADSL-over-ISDN, ITU T-I361, ITU T-I.363.5, ITU T-I.432, ITU T-I610, ITU T-I731
	1	VDSL2	- Support for all VDSL2 profiles: 8 MHz up to 30 MHz ITU-T G993.2 - Complies with the G.Vector standard (ITU-T G.993.5) - Compliant with ITU-T G.998.4 G.INP standard - Compatible with ADSL2 (backward compatibility)
		eVDSL	- Support for all VDSL2 profiles: 8 MHz up to 35 MHz, in accordance with ITU-T G993.2 Annex Q standard (35b or Vplus profiles), capable of aggregate rates up to 400Mbps - G.Vector support (ITU-T G.993.5) - Compliant with ITU-T G.998.4 G.INP standard (protection from impulsive noise) - Compatible with ADSL2 (backward compatibility) - Excellent stability of connections in case of any disturbances on the lines
		GSM/GPRS/EDGE	- Frequency band: 900 / 1800 / 1900 MHz - GPRS multislot 10 - EDGE multislot 12
		UMTS / HSDPA / HSUPA / HSPA+	- WCDMA frequency bands: 900 / 2100 Mhz - HSDPA data transmission rate up to category 20 - HSUPA data rates up to category 6 - HSPA+ data rate: 21.1 Mbps in Downlink and 5.7 in Uplink - Dual Carrier HSPA mode support
RADIO CELLULAR (just on 5272 models)	1	DC-HSPA+	- 42 Mbps in download
		LTE	- Model with LTE cat.4 modem - Frequency bands: 800 / 900 / 1800 / 2100 / 2600 Mhz - Data rate: Category 4, MIMO* - LTE data rate: 150 Mbps in Downlink and 50 Mbps in Uplink - Two APNs can be configured and activated simultaneously - Model with LTE cat.6 modem - Optional version on request
	2	ANTENNAS	- 2 removable antennas, male SMA connector, on the front of the product - Multiple Input/Multiple Output (MIMO) support - Outdoor version antennas (omnidirectional and directional), high-gain and vandal-resistant (optional) also available
	2	SIM	- 2 SIM slots for mini SIM cards, mutually exclusive - 1 factory pre-installed internal slot, 1 external access slot

*NOTE: the throughput value depends on the network configuration, assigned bandwidth, number of users and RF signal conditions.






HARDWARE INTERFACES

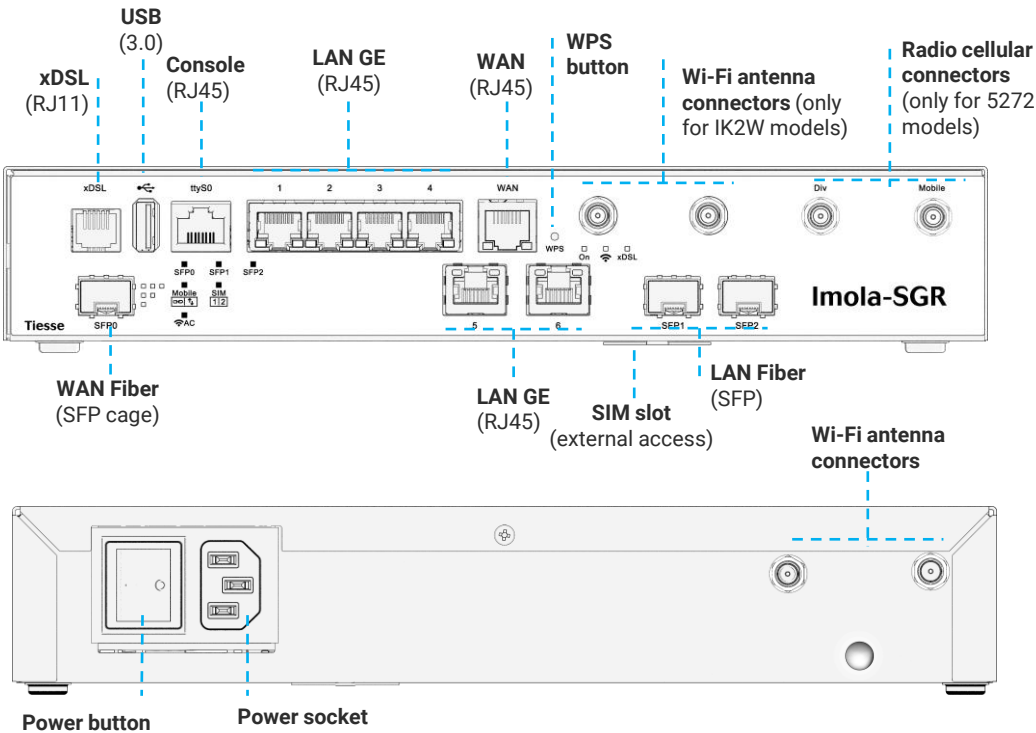

LED DESCRIPTION

NOTE: For an in-depth description of the behavior of each LED, see the manual available at wiki.tiesse.com.

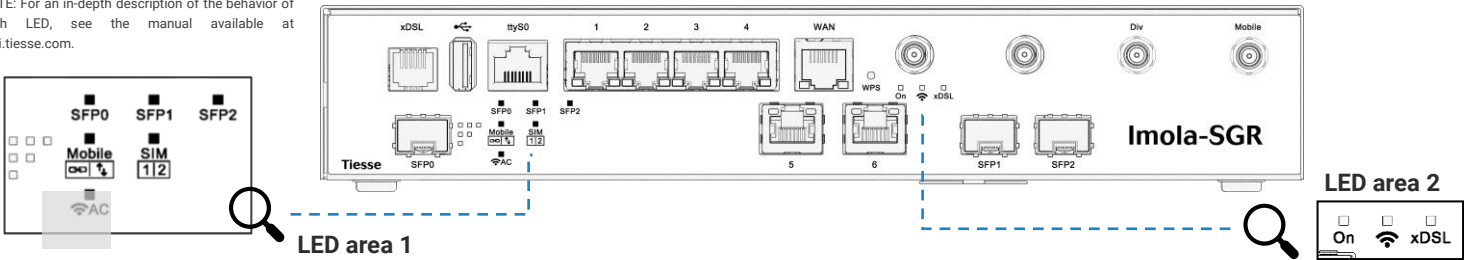

LED	Color	Position	Description
Power	Green	Led area 2	Indica stato operativo dell'alimentazione del prodotto
LAN	Ethernet	Yellow	On LAN port
	Ethernet	Green	On LAN port
	Fiber	Green	Led area 1
	Wi-Fi	Green	Led area 2
WAN	xDSL	Green	Led area 2
	RJ45	Yellow	On WAN port
	RJ45	Green	On WAN port
	Fiber	Green	Led area 1
Radio Cellular	Green/Yellow	Led area 1	Cellular radio link operational status and data activity
	Green/Yellow	Led area 1	SIM in use - operational status



MONITORING AND PERFORMANCE MEASUREMENT FUNCTIONALITIES

IP SLA / Active Probing support for quality measurements	Active measurement of link quality using test packages	Data collection and supervision
- One-Way Delay - Round-Trip Delay - Jitter - Packet Loss	- BFD – Rapid detection of connectivity faults - ICMP Echo / Ping – RTT and reachability - UDP/TCP Probe – Verification with real transport protocols - HTTPS Probe – Application service availability check - TWAMP/OWAMP – Standardised measurement of delay, Jitter and loss	- SNMPv2/v3 – Polling and status traps - Syslog – System event and alarm logs - NetFlow / IPFIX – Traffic flow analysis - TNA MOS Tiesse

SOFTWARE

Note: the following list is purely indicative, active features depend on version and software update (NOS).

NETWORKING	- TCP-UDP IPv4 - ARP ICMP - IPv4 Path MTU Discovery - Supporto IPv6: ICMPv6, IPv6 Path MTU Discovery, IPv6 Neighbor Discovery - Configurazione automatica dell'indirizzo IPv6 Stateless
LAYER 2	- LAN Bridging - VLAN on 802.1Q LAN interfaces in Access mode, Trunk, native VLAN and Hybrid mode - Layer 2 Protocol Tunneling (L2PT) - 802.1Q-in-802.1Q
ROUTING & MULTICAST	- Static, Policy routing, RIPv1, RIPv2; BGP-4, BGP-4+, OSPFv2 - Routing redistribution and tagging - IGMP v1-v2-v3, IGMP snooping, IGMP proxying - Routing multicast con PIMv2 sparse-mode e PIMv2 dense-mode, MSDP - VRRP (Virtual Routing Redundancy Protocol) con autenticazione IPv4-IPv6 - IEEE 802.1d (protocollo ad albero di scansione)
QoS	- Traffic classification based on source IP, destination IP, protocols (UDP, ICMP, TCP, etc.) and ports, and their combinations, on application recognition, on IP Precedence and DSCP - DiffServ - Remarking of IP Precedence, DSCP and CoS - QoS over ATM classes - Shaping with guaranteed allocated bandwidth and redistribution of excess bandwidth - Committed Access Rate and Multicast rate limitation - Traffic prioritization mechanisms, definition of an arbitrary number of priority classes - IEEE 802.3ad link aggregation
SECURITY	- NAT/PAT - ACLs, Stateful Firewall - SSL Tunneling - L2TP - GRE Tunneling with keep alive and key sequence numbering (cellular network optimisation) - VPN with IPSEC/ESP or IPSEC/AH IKEv1/IKEv2
SERVICES	- DHCP client, DHCP server with anti-spoofing functions, DHCP Layer Discovery Protocol IEEE 802.1ab, DHCP relay - Intelligent DNS Proxy, local and remote - Traceroute - NTP Client and Server Support - Easy VPN - DDns
MANAGEMENT & CONFIGURATION	- SNMP v1, SNMPv2, SNMPv3 - Telnet server with multiple simultaneous sessions - SSH server with multiple simultaneous sessions (SSHv2) - Netflow - IP SLA support for: One Way Delay, Round Trip Delay, Jitter, Packet Loss - Fault management Syslog /Trap - Radius Support, TACACS+ - Tracking for backup management, commands and scheduled events - Software update via TFTP, FTP, sFTP, HTTP, HTTPS, SCP - Configuration via command Line Interface (CLI), Text/Menu oriented and Telnet - TNA (Tiesse Network Architecture) suite for auto-provisioning and automated remote management - Management of an unlimited number of configurations



SYSTEM FEATURES

PROCESSOR	Dual CORE 1 GHz
MEMORY	DRAM 256 MB DDR3
FLASH MEMORY	256 MB
CHASSIS	Metal material, black color
FORM FACTOR	Desktop Rack (optional kit)

Wi-Fi
ANTENNAS

- Imola x272-SGR**
- 2 removable external antennas, on the back
 - SMA male connector

- Imola x272-SGR-IK2W**
- 4 removable external antennas, 2 on the rear and 2 on the front
 - SMA male connector


4G
ANTENNAS

- Models 5272 only**
- 2 removable external antennas, on the front side
 - Male SMA connector

ADD-ONS

Optional accessories such as antennas for both indoor and outdoor omnidirectional and directional installations, SFP transceiver modules and rack-mount kits are available.

Please check the add-ons datasheets, which can be downloaded from www.tiesse.com.

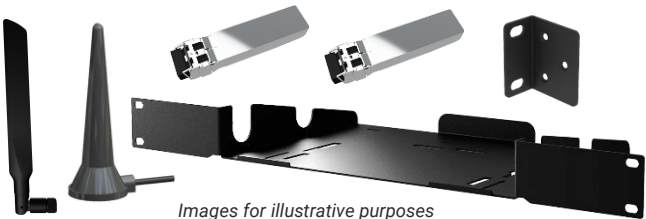

OTHER INFORMATION AND SUPPORT

SUPPORTO.TIESSE.COM



- Technical documentation, installation instructions, quick start guide, first access data
- Firmware updates
- Declaration of conformity EMC, RED, RoHS, ...
- Technical support request
- End of sale and end of product support information
- Warranty repair and product reconditioning

WIKI.TIESSE.COM



- Website dedicated to software documentation
- User manuals
- First access guides
- Case studies, tutorials and other useful resources for product use

PRODUCT IMAGES



Imola 0272-SGR



Imola 5272-SGR-IK2W




SUSTAINABILITY

SYSTEM

Power	- Internal 100-240 VAC (IEC socket) - On/Off button	
Power (optional version)	- DC/DC converter with extended input range (18-75Vdc)	
Cooling	Fanless	
Consumption (full functions)	Imola 0272-SGR: ≈ 9W	Imola 0272-SGR-IK2W: ≈ 10,5W
	Imola 5272-SGR: ≈ 10,5W	Imola 5272-SGR-IK2W: ≈ 12W
EEE (Energy-Efficient Ethernet)	Tiesse products comply with the EEE (802.3az) standard, which saves energy by automatically switching off Ethernet ports when not in use.	
Dynamic Power Scaling	Tiesse products use control mechanisms to automatically reduce power consumption by lowering the CPU clock frequency when the load is low.	
Mean Time Between Failure (MTBF)	Imola 0272-SGR: 305724 hours	Imola 0272-SGR-IK2W: 305724 hours
	Imola 5272-SGR: 316061 hours	Imola 5272-SGR-IK2W: 316061 hours

ENVIRONMENT DATA

Operating temperature	-25° C / +70° C (96 hours) -40° C / +70° C (4 hours)
Storage temperature	-40° C / +70° C
Maximum relative operating humidity	93% (non condensing)
Protection grade	IP40

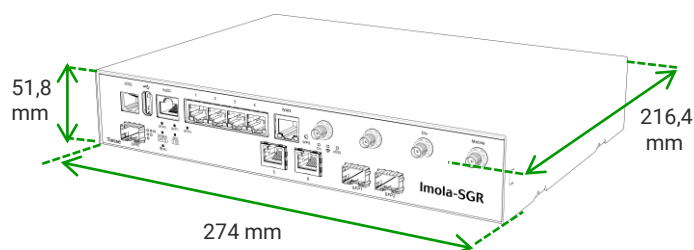

SIZE and WEIGHT – IMOLA 0272-SGR

Machine body	274 x 210,4 x 51,8 (L x P x A mm)		
	≈ 2290 gr (maximum weight including packaging and accessories)		
Total weight	Product	Accessories	Packaging
	≈ 1840 gr	≈ 280 gr	≈ 170 gr

SIZE and WEIGHT – IMOLA 0272-SGR-IK2W

Machine body	274 x 216,4 x 51,8 (L x P x A mm)		
	≈ 2360 gr (peso massimo comprensivo di packaging e accessori)		
Total weight	Product	Accessories	Packaging
	≈ 1875 gr	≈ 295 gr	≈ 179 gr

SIZE and WEIGHT – IMOLA 5272-SGR

Machine body	274 x 216,4 x 51,8 (L x P x A mm)		
	maximum weight including packaging and accessories		
Total weight	Product	Accessories	Packaging
	≈ 1870 gr	≈ 410 gr	≈ 175 gr

SIZE and WEIGHT – IMOLA 5272-SGR-IK2W

Machine body	274 x 216,4 x 51,8 (L x P x A mm)		
	≈ 2505 gr (peso massimo comprensivo di packaging e accessori)		
Total weight	Product	Accessories	Packaging
	≈ 1875 gr	≈ 425 gr	≈ 205 gr

OTHER INFORMATION

Packaging and wrapping	The packaging material of this product is ≈87% paper/cardboard, and the incidence of plastic packaging is about 13% or less. 100% of the packaging material is recyclable
RAEE waste	For the correct disposal of Waste Electrical and Electronic Equipment (WEEE), pursuant to Article 26 of Legislative Decree No. 49 of 14 March 2014 'Implementation of Directive 2012/19/EU': contact raee@tiesse.com



Tiesse is a totally Italian company with more than 25 years of experience in the design, development and production of network equipment and IoT devices, suitable for use in mission-critical and industrial scenarios. Tiesse's most successful series, Imola, Lipari and Levanto, are innovative, competitive and certified, and are present in the networks of the major telecommunications operators, in the energy sector, large-scale distribution and vertical sectors, both in the Italian and foreign markets.

Further information on Tiesse solutions can be found on the company website www.tiesse.com.



Info: info@tiesse.com

Marketing & sales: marketing@tiesse.com

Tel. +39.0125.230544

www.tiesse.com



© Copyright Tiesse S.p.A.

Any disclosure, derivation or reproduction of this document, even partial, is strictly prohibited without prior written authorization by Tiesse S.p.A.

Disclaimer

The informations in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Tiesse may change the informations at any time without notice.

Ver. ENG 221025

