



Imola LX 0272-IKF



Imola LX 0272-IKF



eVDSL and fiber router

SERIE IMOLA LX x272

The **Imola LX x272** series is an advanced line of routers with eVDSL 35b plus and Gigabit Ethernet WAN connectivity, designed specifically for business applications that require high security standards and optimal network performance.

The compact size make the Imola LX x272 models easy to install in any environment, while the low-power design helps reduce operating costs.

ALL-IN-ONE



FTTC, FTTH and eVDSL, in a single device for reliable, versatile and scalable connectivity. Our Imola LX series devices are adaptable to any technology and include the features

- Routing & switching
- Multi fail-over
- QoS

KEY FACTORS



Secure by design

Right from the design phase for robust and natively secure solutions.



Always-On

Stable connections anywhere, with multiple links, transparent backup, and quality of service for uninterrupted business.



Certified

Validated for inclusion in business offering profiles and use within the networks of major telecom operators.



Rugged and carrier grade

Designed to withstand and operate for long periods in industrial and disturbed environments. Carrier grade reliability.



Smart value

Maximizes business value with an excellent performance-to-price ratio.



Zero Touch Provisioning

Zero Touch Provisioning facilitates remote management and agile configuration of the installed base.



Eco-efficient

Minimal consumption, lower environmental impact and higher operating cost savings.



Factory pre-configurations

Receive your product pre-configured according to your specific case.




100% factory-tested

We test all our equipment, including SIM cards for models with a cellular radio connection.




Imola LX 0272-IKF is a high-performance Router/ IAD designed for professional eVDSL networks and analog voice links up to 2 calls, ideal for businesses and commercial establishments that need reliability and advanced management of data and voice traffic.


Imola LX 0272-IKF offers advanced Quality of Service (QoS), security and routing features.

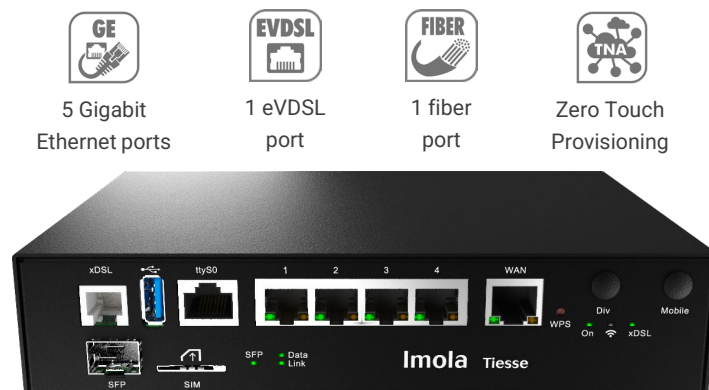


SUGGESTED SCENARIOS AND APPLICATIONS



ISP & Telco Ready
Designed to meet the requirements of service providers, telecom operators, carriers, and system integrators.



Backup and redundancy on multiple links
Optimised products for ultra-connected branches and remote locations



Service continuity and Mission Critical applications

- Data Services for Small and Medium-sized Enterprises
- Banks and Insurance
- Retail

BACKUP: high availability mission critical

Seamless backup

The user does not perceive service interruptions and the transition to backup.

Transitions from normal to backup mode and vice versa are performed considering the operational costs.

Multiple Backup

A pair of routers in VRRP performs physical backup of both the network and hardware.


Homogeneous Backup

A single router integrates all ports, wired and mobile.

Heterogeneous backup

An installed base can be upgraded by adding a mobile router and using the VRRP (Virtual Router Redundancy Protocol).

ZERO TOUCH PROVISIONING

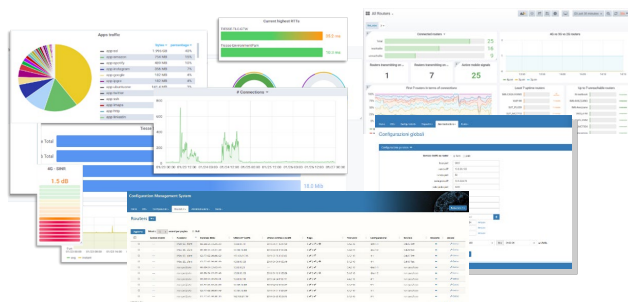

Tiesse's router are integrated in the **TNA (Tiesse Network Architecture)** suite.


TNA is the modular software suite that enables Zero Touch Provisioning network architecture, including monitoring, remote and automated web-based management of configurations and firmware releases of the installed fleet; it enables traffic engineering, network overlays, and many other functionalities.

A complete datasheet of the solution is available at www.tiesse.com.




HARDWARE INTERFACES

Port	N°	Type	Details
LAN	4	GE	10/100/1000 Mbps
	1	GE	10/100/1000 Mbps (label WAN)
	1	Fiber	1 port with SFP cage for fibre and GPON connections - combo with GE WAN port (SFP transceiver module not included)
WAN			Full rate ADSL2/2+ / eVDSL
		ADSL2/2+	<ul style="list-style-type: none">- Downstream data rate up to 24 Mbps and upstream data rate up to 3.5 Mbps- Compliant with Standard G.992.1 annex A, B, C & I, G.992.2-g.Lite, G.992.3 annex A, B, I, J, M, G.992.4-g.Lite.bis, G.992.5 annex A, B, C, I, J, M, ANSI T1.413 issue2, ETSI TS 388- ADSL-over-ISDN, ITU T-I361, ITU T-I.363.5, ITU T-I.432, ITU T-I610, ITU T-I731
	1	VDSL2	<ul style="list-style-type: none">- Support for all VDSL2 profiles: 8 MHz up to 30 MHz ITU-T G993.2- Compliant with G.Vector standard (ITU-T G.993.5)- Compliant with ITU-T G.998.4 G.INP standard- Compatible with ADSL2 (backward compatibility)
		eVDSL	<ul style="list-style-type: none">- Support for all VDSL2 profiles: 8 MHz up to 35 MHz, in compliance with ITU-T G993.2 Annex Q (35b or Vplus profiles), capable of aggregate rates of up to 400Mbps- G.Vector support (ITU-T G.993.5)- Compliant with ITU-T G.998.4 G.INP standard (impulse noise protection)- Compatible with ADSL2 (backward compatibility)- Excellent connection stability in case of line disturbances

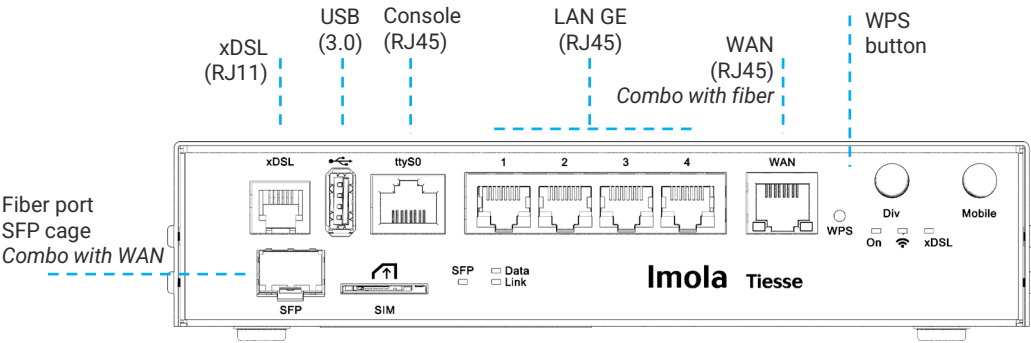

LEDs

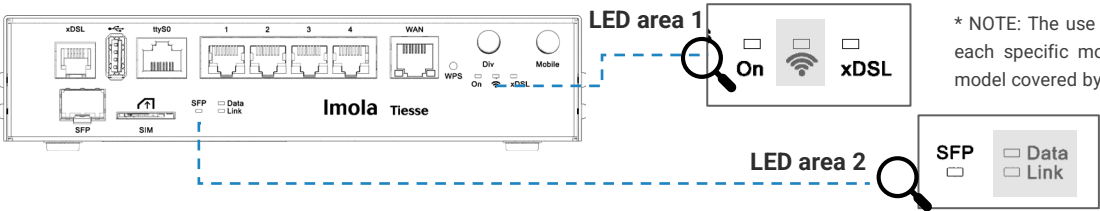

* NOTE: The use of LEDs depends on the active functionality of each specific model. The figure shows the LEDs used in the model covered by this datasheet.

LED	Color	Position	Details
Power	Green	LED area 1	Power status
xDSL	Green	LED area 1	xDSL connection status
LAN	Yellow	On the LAN port	One for each ETH port, 1Gbps connection status
	Green	On the LAN port	One for each ETH port, 100 Mbps connection status
Fiber	Green	LED area 2	indicates operational status Steadily lit: active connection Blinking: presence of data traffic



SOFTWARE

Note: the following list is purely indicative, active features depend on version and software update (NOS).

NETWORKING

- TCP-UDP IPv4
- IPv6

LAYER 2

- LAN Bridging
- VLAN on 802.1q LAN interfaces in Access mode, Trunk, native VLAN and Hybrid mode
- Layer 2 Protocol Tunneling (L2PT)
- 802.1Q-in-802.1Q

ROUTING & MULTICAST

- Static, Policy routing, RIPv1, RIPv2
- BGP-4, BGP-4+
- OSPFv2
- VRF Lite, Routing redistribution and tagging
- IEEE 802.1d (Spanning Tree Protocol)
- VRRP (Virtual Routing Redundancy Protocol) with IPv4-IPv6 authentication
- IGMP v1-v2-v3, IGMP snooping, IGMP proxying
- Multicast routing with PIMv2 sparse-mode and PIMv2 dense-mode, MSDP

QoS

- Traffic classification based on source IP, destination IP, protocols (UDP, ICMP, TCP, etc.) and ports, and their combinations, on application recognition, on IP Precedence and DSCP
- DiffServ
- Remarking of IP Precedence, DSCP and CoS
- QoS on ATM classes
- Shaping with guaranteed bandwidth allocation and redistribution of excess bandwidth
- Committed Access Rate and Multicast rate limit
- Traffic prioritisation mechanisms, definition of an arbitrary number of priority classes
- IEEE 802.3ad link aggregation

SECURITY

- NAT/PAT
- ACLs, Stateful Firewall
- SSL Tunneling
- L2TP
- GRE Tunneling with keep alive and key sequence numbering (cellular network optimisation)
- VPN with IPSEC/ESP or IPSEC/AH IKEv1/IKEv2
- 3 DES Encryption

SERVICES

- DHCP client, DHCP server with anti-spoofing functions, DHCP Layer Discovery Protocol IEEE 802.1ab, DHCP relay
- Intelligent DNS Proxy, local and remote
- Traceroute
- NTP Client and Server Support
- Easy VPN
- DDns

MANAGEMENT & CONFIGURATION

- SNMP v1, SNMPv2, SNMPv3
- Telnet server with multiple simultaneous sessions
- SSH server with multiple simultaneous sessions (SSHv2)
- Netflow
- IP SLA support for: One-way delay, round trip delay, jitter, packet loss
- Syslog /Trap fault management
- Radius, TACACS+ support
- Tracking for management of backups, commands and scheduled events
- Software update via TFTP, FTP, sFTP, HTTP, HTTPS, SCP
- Configuration via Command Line Interface (CLI), Text/Menu oriented and Telnet
- TNA (Tiesse Network Architecture) suite for self-provisioning and automated remote management
- Management of an unlimited number of configurations



SYSTEM FEATURES

PROCESSOR	RISC Network processor
MEMORY	DRAM 256 MB – DDR3
FLASH MEMORY	256 MB
CHASSIS	Metallic material, black color
FORM FACTOR	Desktop

ADD-ONS

Optional accessories such as omnidirectional and directional antennas for both indoor and outdoor installations are available.

Please consult the relevant datasheets, which can be downloaded from www.tiesse.com.



Images for illustrative purposes

OTHER INFORMATION AND SUPPORT

SUPPORTO.TIESSE.COM



- Technical documentation, installation instructions, quick start guide, first access data
- Firmware updates
- Declaration of conformity EMC, RED, RoHS, ...
- Technical support request
- End of sale and end of product support information
- Warranty repair and product reconditioning

WIKI.TIESSE.COM



- Website dedicated to software documentation
- User manuals
- First access guides
- Case studies, tutorials and other useful resources for product use



SUSTAINABILITY

SYSTEM

Power	<ul style="list-style-type: none">- 12V AC/DC Adapter- On/Off button
Cooling	Fanless
Consumption (full functions)	≈ 8W
EEE (Energy-Efficient Ethernet)	Tiesse products comply with the EEE (802.3az) standard, which saves energy by automatically switching off Ethernet ports when not in use.
Dynamic Power Scaling	Tiesse products use control mechanisms to automatically reduce power consumption by lowering the CPU clock frequency when the load is low.
Mean Time Between Failure (MTBF)	≈ 751608 hours

ENVIRONMENT DATA


Operating temperature	–5° C / +50° C
Storage temperature	–40° C / +70° C
Maximum relative operating humidity	93% (non condensing)

SIZE and WEIGHT – IMOLA LX 0272-IKF

Machine body	198 x 144 x 45,4 (L x P x A mm)		
	≈ 1485 gr (maximum weight including packaging and accessories)		
Weight	Product	Accessories	Packaging
	≈ 945 gr	≈ 425 gr	≈ 95 gr

OTHER INFORMATION

Packaging and wrapping	The packaging material of this product is ≈92% paper/cardboard, and the incidence of plastic packaging is about 8% or less. 100% of the packaging material is recyclable
RAEE waste	For the correct disposal of Waste Electrical and Electronic Equipment (WEEE), pursuant to Article 26 of Legislative Decree No. 49 of 14 March 2014 'Implementation of Directive 2012/19/EU': contact raee@tiesse.com

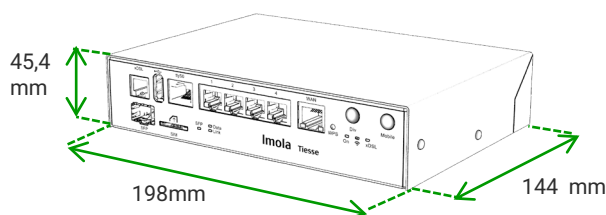



Tiesse is a totally Italian company with more than 25 years of experience in the design, development and production of network equipment and IoT devices, suitable for use in mission-critical and industrial scenarios. Tiesse's most successful series, Imola, Lipari and Levanto, are innovative, competitive and certified, and are present in the networks of the major telecommunications operators, in the energy sector, large-scale distribution and vertical sectors, both in the Italian and foreign markets.

Further information on Tiesse solutions can be found on the company website www.tiesse.com.



Info: info@tiesse.com

Marketing & sales: marketing@tiesse.com

Tel. +39.0125.230544

www.tiesse.com



© Copyright Tiesse S.p.A.

Any disclosure, derivation or reproduction of this document, even partial, is strictly prohibited without prior written authorization by Tiesse S.p.A.

Disclaimer

The informations in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Tiesse may change the informations at any time without notice.

Ver. ENG 120625

